


### Specifications

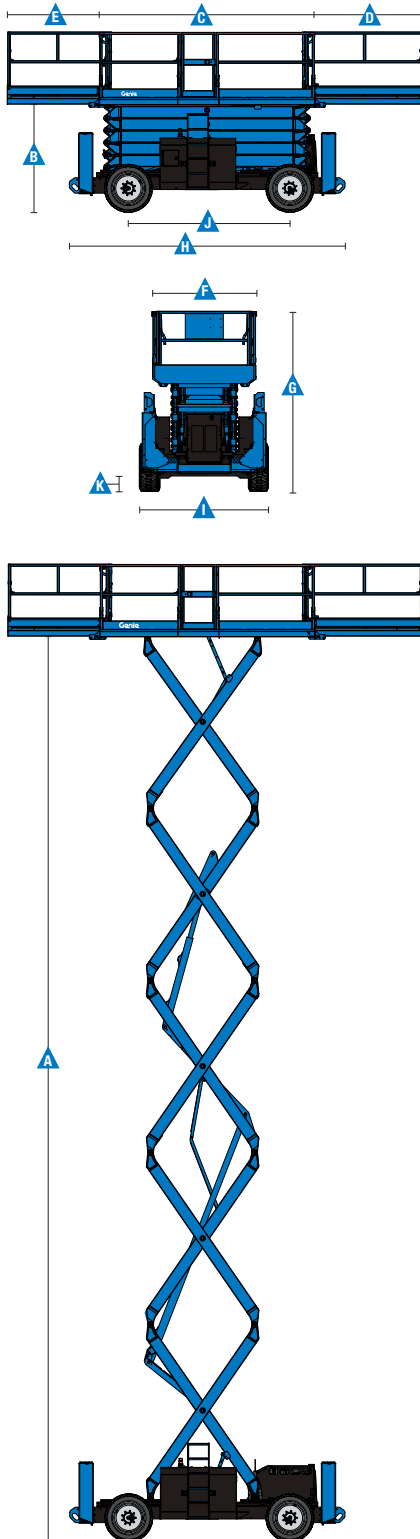

Model	GS-3384 RT	
Measurements	US	Metric
Working height maximum <sup>1</sup>	39 ft	12.06 m
<b>A</b> Platform height maximum	33 ft	10.06 m
<b>B</b> Platform height - stowed <sup>2</sup>	5 ft 1 in	1.55 m
<b>C</b> Platform length:		
outside, extended - single deck	12 ft 11.25 in	3.94 m
outside, extended - dual deck	17 ft 6.25 in	5.34 m
outside, extended - dual deck	21 ft 6.5 in	6.57 m
<b>A</b> Slide-out platform extension deck - front	5 ft	1.52 m
<b>A</b> Slide-out platform extension deck - rear	4 ft	1.22 m
<b>A</b> Platform width - outside	6 ft	1.83 m
<b>A</b> Height - stowed: folding rails	8 ft 9.5 in	2.68 m
rails lowered	6 ft 6.75 in	2.0 m
<b>A</b> Length - stowed: single deck	12 ft 11.25 in	3.94 m
dual deck	13 ft 0.5 in	3.98 m
with outriggers	16 ft	4.88 m
<b>A</b> Width: standard tires	7 ft	2.13 m
high flotation tires	7 ft 11 in	2.41 m
<b>A</b> Wheelbase	9 ft 4 in	2.84 m
<b>A</b> Ground clearance - center	13 in	.33 m

### Productivity

Maximum platform occupancy (in/out)	7/7	
Lift capacity	2,500 lbs	1,134 kg
Lift capacity - extension deck	500 lbs	227 kg
Drive height	full height	
Drive speed - stowed	4.0 mph	6.4 km/h
Drive speed - raised	0.7 mph	1.1 km/h
Gradeability - stowed <sup>3</sup>	50%	
Tilt sensor activation - front to back	3°	
- side to side	2°	
Maximum outrigger leveling: front to back	7°	
side to side	12°	
Turning radius - inside	10 ft 1.5 in	3.09 m
Turning radius - outside	19 ft 6 in	5.94 m
Raise/lower speed	45/29 sec	
Controls	proportional	
Drive	four wheel	
Tires - foam-filled rough terrain	10 x 31 in	25 x 79 cm

### Power

Power source	Ford MSG-425 4 cylinder gas/LPG 75 hp (56 kW) Deutz D2011L03i 3 cylinder diesel 49 hp (36 kW) air cooled	
Auxiliary Power unit	12 V DC	
Fuel tank capacity	30 gal	113.6 L
Hydraulic system capacity	30 gal	113.6 L

### Weight<sup>4</sup> / Floor Loading<sup>5</sup>

Weight - ANSI/CSA	11,825 lbs	5,364 kg
- with outriggers	13,500 lbs	6,124 kg
Tire load, maximum	4,689 lb	2,127 kg
Tire contact pressure	129 psi	886 kPa
Occupied floor pressure	177 psf	8.49 kPa

### Standards Compliance

ANSI A92.20, CSA B354.6, CE EN280, AS 1418.10

<sup>1</sup> The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

<sup>2</sup> Based on RT tires; deduct 2 in (5.8 cm) for turf and non-marking tires.

<sup>3</sup> Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See operator's manual for details regarding slope ratings.

<sup>4</sup> Weight varies depending on options and country standards.

<sup>5</sup> Note: Floor loading information is approximate and does not incorporate different option configurations. It should be used only with adequate safety factors.

### Features

#### Standard Features

##### Measurements

- 39 ft (12.06 m) working height
- Up to 2,500 lbs (1,134 kg) lift capacity

##### Productivity

- 156.5 x 72 in (3.98 x 1.83 m) steel frame platform
- 60 in (1.52 m) extension deck
- Replaceable aluminum diamond plate deck
- Drive at full height
- Folding rails
- Proportional lift and drive
- Platform load sense system
- Platform control guard
- Onboard diagnostic system
- AC power to platform
- Full height swing gate
- Two self-closing gates
- 4WD
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Foam-filled rough terrain tires
- Tilt level sensor with audible alarm
- Dual flashing LED beacons
- Descent alarm
- Horn
- Hour meter
- Motion alarm
- Lift Connect™ Telematics

##### Power

- 48 hp (36 kW) Deutz D2.9L4 diesel, Tier 4f


#### Options & Accessories

##### Productivity Options

- Dual slide-out platform extension deck package 5 ft (1.52 m) front and 4 ft (1.22 m) rear
- Automatic leveling hydraulic outriggers
- Air line to platform
- Foam filled non-marking rough terrain tires
- High flotation foam-filled tires
- Biodegradable hydraulic oil
- Platform control guard

##### Power Options

- 75 hp (56 kW) Ford MSG 425 gas/LPG
- AC, 2000 Watt generator (120 V / 60 Hz), (includes hydraulic oil cooler)
- Cold weather package
- Hydraulic oil cooler
- Diesel catalytic scrubber muffler
- LPG steel tank only, 33.5 lb capacity

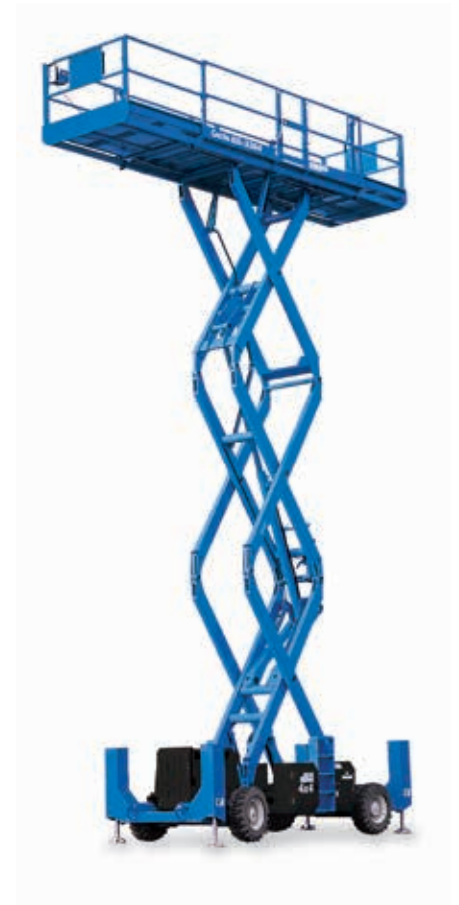

#### Genie United States

6464 185th Ave. NE  
Redmond, WA 98052  
Telephone +1 (425) 881-1800  
Toll Free in USA/Canada +1 (800)-536-1800  
Fax +1 (425) 883-3475

#### Distributed By: